
## **PWC TRAILER BUNK**

ASSEMBLY INSTRUCTIONS
P/N 558-21000-00

## Tools Required:


- (2) 9/16" wrenches or sockets
- (1) 3/4" wrench or socket




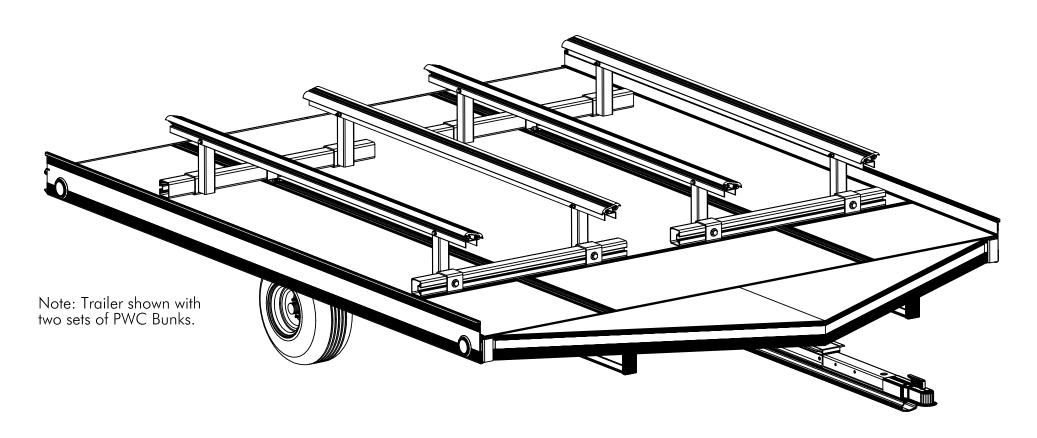


ISSUE 04-10-01 658-21000-00 Manufactured by: FLOE INTERNATIONAL, INC. 48473 State Hwy. 65 McGregor, MN 55760


## PWC TRAILER BUNK EXPLODED VIEW

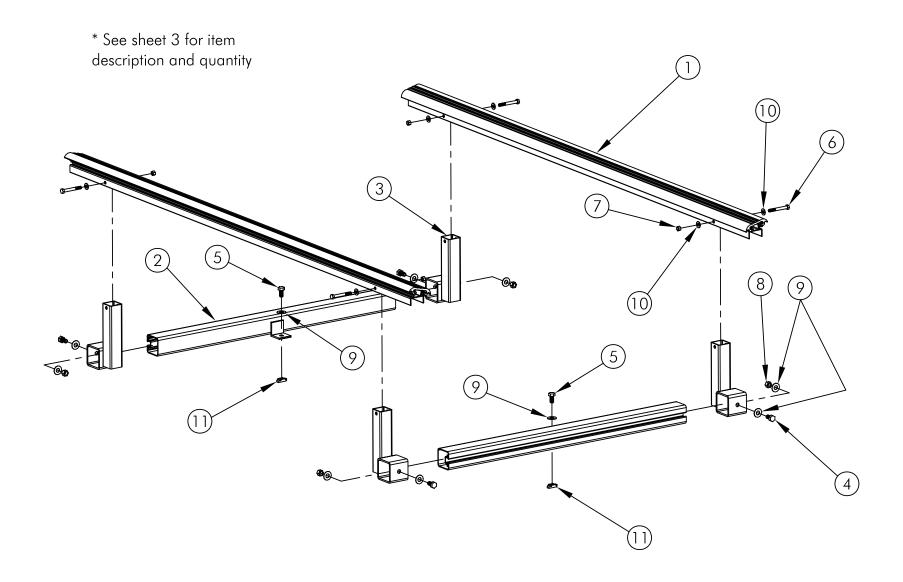

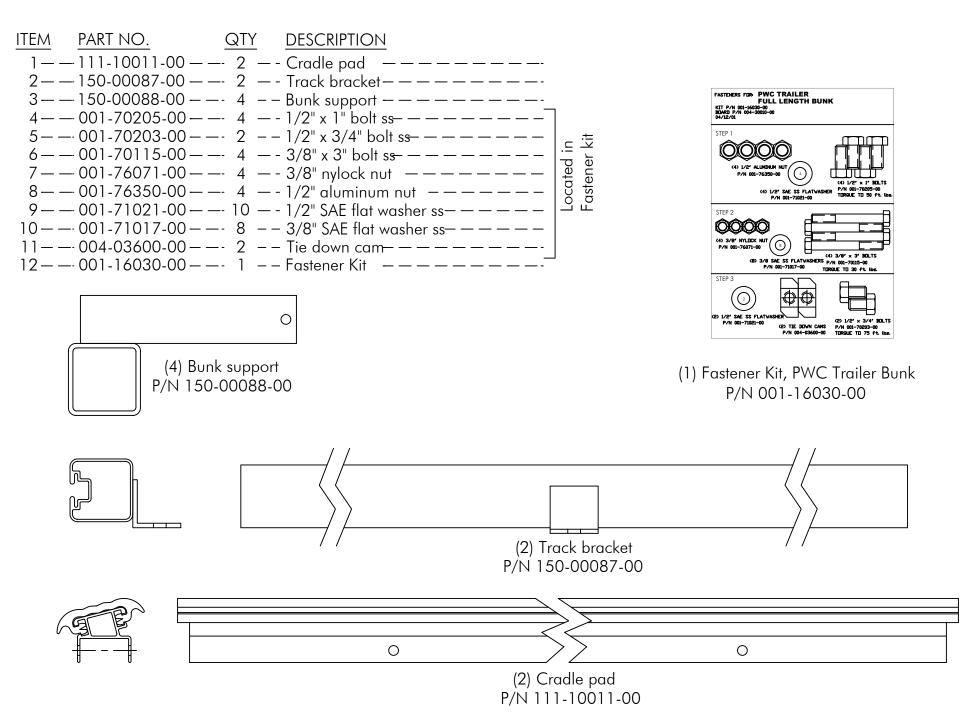


Sheet 3 of 4

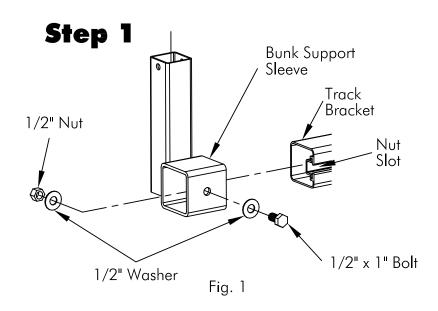

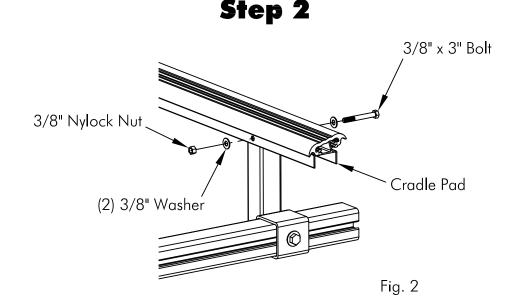

Step 3 Fig. 3

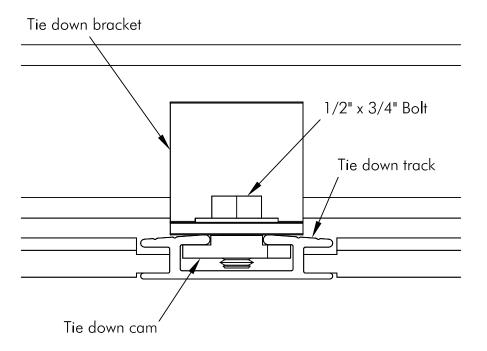

- 1. Insert a 1/2" nut & 1/2" washer into the nut slot. Slide the Bunk Support Sleeve over the Track Bracket as shown in Fig. 1. Note the orientation of the nut slot in the Track Bracket. Line up the nut & washer with the hole in the sleeve, insert the 1/2" bolt & washer, and finger tighten. Repeat on the opposite end, and copy the proceedure on the 2nd Track Bracket.
- 2. On a large flat surface, set the Track Brackets approx. 65 inches apart. Refer to Fig. 2 for orientation. Line up the 13/32" dia holes in the Cradle Pad with the upper holes in the Bunk Support. Insert the 3/8" x 3" bolt & a 3/8" washer, secure on opposite side with 3/8" nylock nut & washer. Torque to 30 ft./lbs. Repeat on opposite end , and copy step 2 on the other cradle pad.
- 3. Place the completed trailer bunk onto the trailer as seen on Sheet 1, centering front to back, and placing the tie down bracket over the tie down track. Insert a tie down cam into the tie down track and center on the bolt hole. Thread the 1/2" bolt & washer to the tie down cam. Torque to 75 ft./lbs.