
FLOE DC WINCH BATTERY TRAY

P/N 511-53050-00 ASSEMBLY INSTRUCTIONS



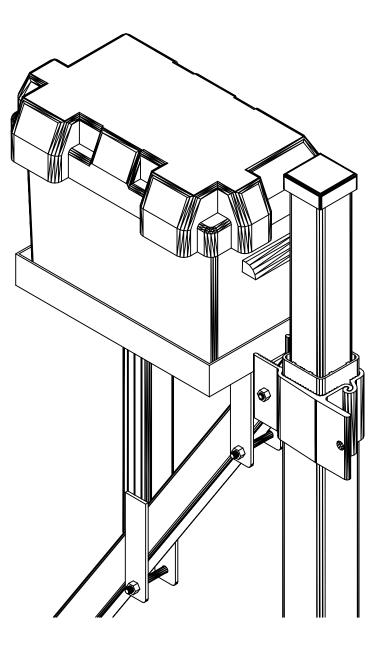


Tools Required:

(2) 9/16" sockets or wrenches Torque wrench

> Manufactured by: Floe International, Inc. 48473 State Hwy. 65 McGregor, MN 55760 www.floeintl.com.

BATTERY TRAY EXPLODED VIEW P/N 511-53050-00

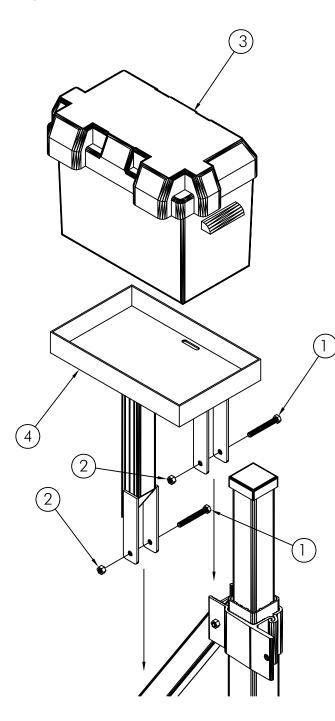

Item Part No. Qty. Description 1

- 001-70115-00.....2.....HHCS, 3/8-16 x 3" 18-8 ss
- 2 001-76349-00.....2.....Nut, 3/8-16 Aluminum
- 3 002-03106-00....1....Box, Battery
- 111-00012-00.....1.....Weldment, Battery Tray 4

STEP 1

Slide the battery tray assembly over the v-brace attached to winch post. Position the battery tray assembly close to the winch post to insure adequate power cable length. Insert the (2) HHCS 3/8-16 x 3" with (2) 3/8-16 nylock nuts through the holes in the battery tray support legs and torque to 25 ft/lbs. See Fig. 1.

NOTE:

Refer to DC winch instructions for mounting and wiring of DC winch.

